


Specifications

Door Prep	Cross Bore 2-1/8". Edge bore 1".
Backset	Adjustable 2-3/8" or 2-3/4". UL functions 2-3/4" standard or 2-3/8" optional.
Door Thickness	1-3/8" - 1-3/4" Doors standard. 2-1/4" doors optional on 720 and 740 functions only.
Cylinder	SmartKey Security™ or Pin & Tumbler
Faceplates	1" x 2-1/4" Specify round corner, square corner or drive-in.
Strikes	2-1/4" Full lip. Specify round corner or square corner. Other options available.
Bolt	1/2" Throw
Door Handling	Reversible for both Left and Right handed doors. Specify handing only with Inactive and Interior Pack levers.
ANSI/BHMA	Grade 2 Certified
ADA	Functions 720 and 788 satisfy section 4.13.9 ADA requirement.
UL	Meets UL 3 hour fire rating for 725, 735, 745, 746, 755. Optional UL 1/3 hour fire rating for all functions.

Dimensions

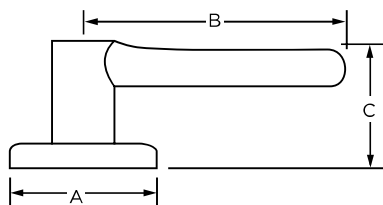


Design	A	B	C	C (Keyed)
Tustin™	2 5/8"	4 7/32"	2 3/32"	2 19/32"


Functions



Passage/Hall/Closet: Both levers always free



Privacy/Bed/Bath: Both levers locked or unlocked by turnbutton inside. Outside lever unlocked by emergency key



Keyed Entry Lever: Both sides locked or unlocked by key outside or turnbutton inside



Half Dummy Trim, Surface Mounted: For doors where only a pull is required. No operation



Tustin™ Lever
in Satin Nickel




Tustin™ Lever
in Venetian Bronze

Finishes



Polished
Brass **3**



Antique
Brass **5**



Venetian
Bronze **11P**



Satin
Nickel **15**



Antique
Nickel **15A**



Polished
Chrome **26**



Satin
Chrome **26D**



Iron
Black **514**

LIFETIME
WARRANTY